

ASD = Allowable Strength Design (may be load limited), LRFD = Load and Resistance Factor Design (not load limited)

¹Refer to Design concrete tables to determine eligibility


²Except for use in Canada, use only for 1.5+ hr. Restrained Assemblies / Restrained beams and with all joists. Otherwise for all 1 hr ratings and all Unrestrained Assemblies / Beams, refer to 'ASD' Designs

³Refer to N823 unrestrained beam thicknesses for possible thickness reductions, which may be used in lieu of 1.5, 2, 3 or 4 hour restrained thickness

⁴Refer to Assembly

**Contact Isolatek Technical

N/A=Not Available

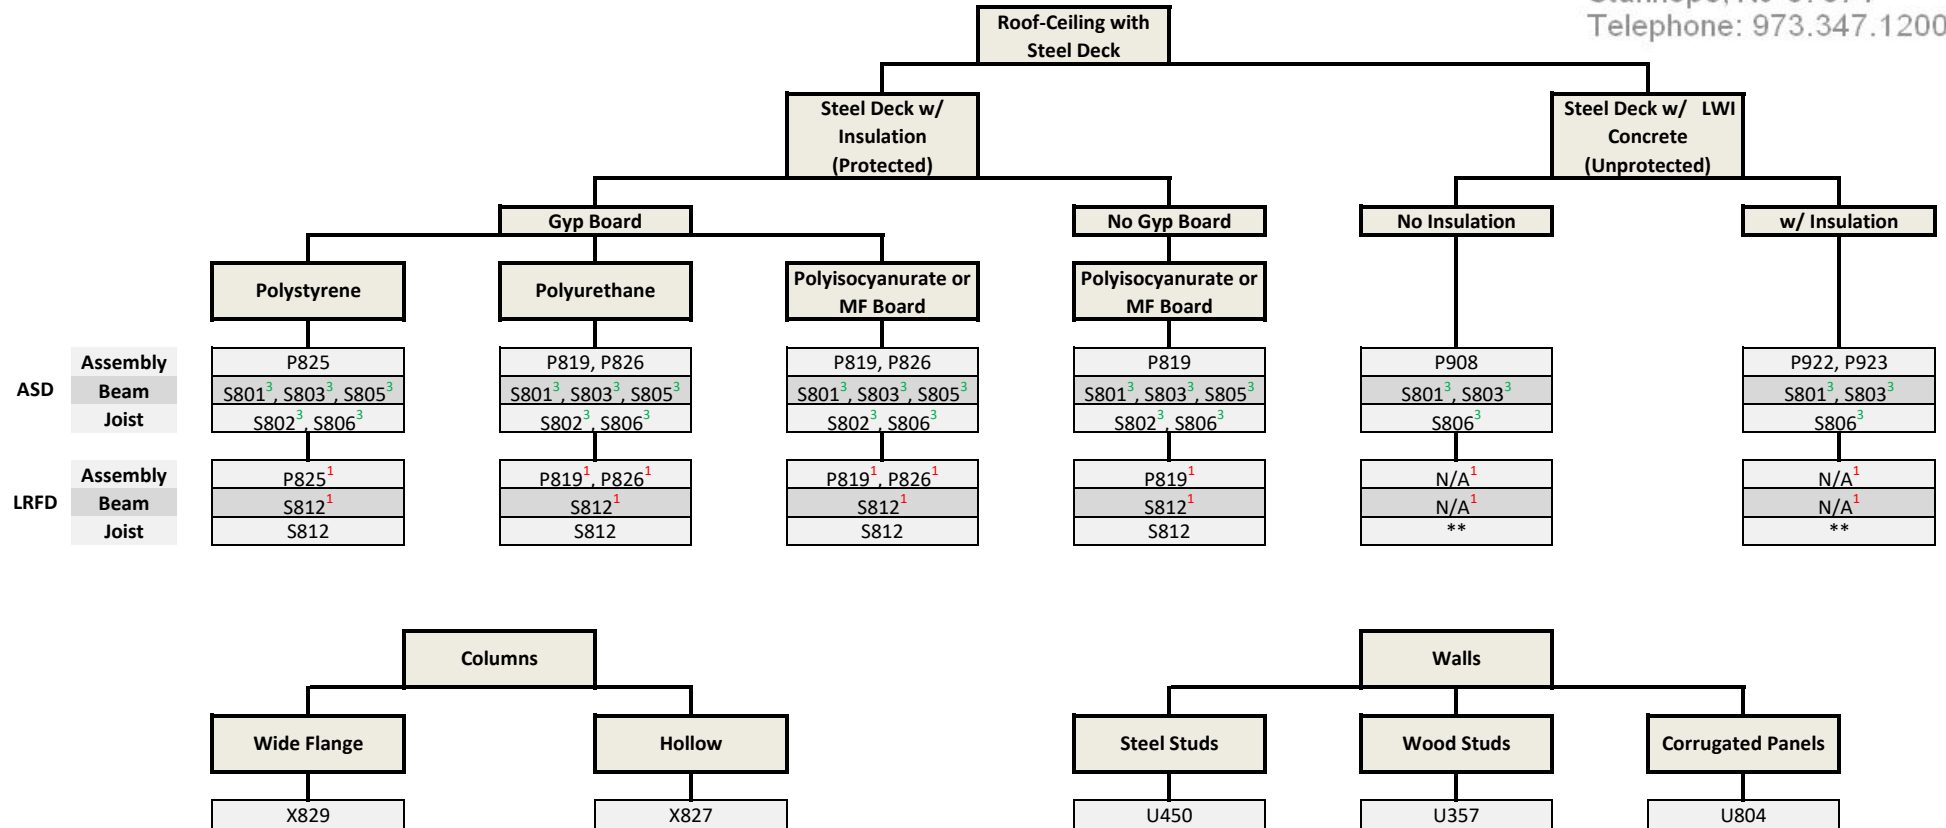

ASD = Allowable Strength Design (may be load limited), LRFD = Load and Resistance Factor Design (not load limited)

¹Except for use in Canada, use only for 1.5+ hr. Restrained Assemblies / Restrained beams and all joists. Otherwise for all 1 hr ratings and all Unrestrained Assemblies / Beams, refer to 'ASD' Designs

²Refer to Assembly. You may be able to obtain most efficient thickness on beams and joists in the Assembly.

N/A=Not Available

**Contact Isolatek Technical